

# ROOFCARGOBAG FITTING INSTRUCTIONS


SUM-830 Large Roof Cargo Bag 34"x34"x18"  
SUM-831 Extra Large Roof Cargo Bag 38"x38"x18"

## IMPORTANT

READ FULLY BEFORE FITMENT  
AND KEEP INSTRUCTIONS FOR  
FUTURE REFERENCE




**RULES OF THE ROAD - Avoid:** 1) Overloading 2) Bad roads 3) Quick acceleration 4) Heavy Braking 5) Uneven loading 6) Improperly fastened loads 7) Oversized loads  
8) Check frequently that load is securely fastened to the rack and the rack to the car.

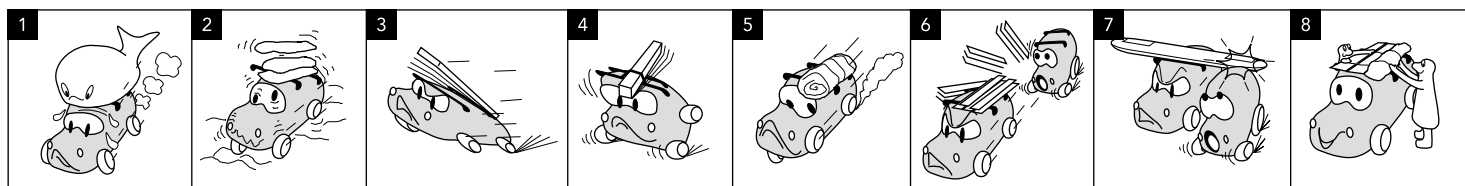


**WARNING:** Our box is produced with the greatest care and is guaranteed against any fault in materials and workmanship. The purchaser acknowledges that the manufacturer has no control over the attachment of its products to vehicles or the attachment of items to the manufacturer products. Accordingly the manufacturer cannot assume responsibility for any damage to any property arising out of the improper attachment or use of its products. Read and follow assembly and mounting instructions carefully before using products. Rack and box must be absolutely tight on the car roof. Check the security of fitment after ten miles and then every 100 miles on poor surfaces or twisting roads. Always check that brackets are fully engaged on each side of your car

under a strong metal part of the bodywork (this is most important especially in the case of cars with only two or three doors. Check vehicle manufacturer's handbook for maximum roof loading recommendations. 75 kg evenly distributed between front and rear bars is usually the maximum allowed weight. - Take into consideration the weight of the bars (8 kg) (e.g. vehicle max roof load, 75 kg - capacity 75 - 8 = 67 kg) - Never exceed vehicle max; roof loading capacity, also take into consideration further loading on bars. Adapt your travelling speed to the load being carried. Bulky loads (i.e. cargo box) create significant wind drag, this requires special attention. Do not drive over 55 mph. Keep these instructions for future use.

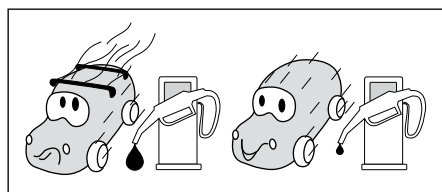

Remove when not in use to save fuel consumption



Remember the additional height when driving in restricted areas

# SUM-830 Large Roof Cargo Bag 34"x34"x18"

# SUM-831 Extra Large Roof Cargo Bag 38"x38"x18"


## CONTENTS:

Cargo pack, including 8 strap system - QTY 1  
Strengthening platform - QTY 1

NOTE: For use with roof bars, centres 540 to 650mm max - SUM-830.  
For use with roof bars, centres 540 to 750mm max - SUM-831


## ASSEMBLY:

1. Attach relevant roof bars to vehicle in accordance with vehicle handbook and roof bar instructions

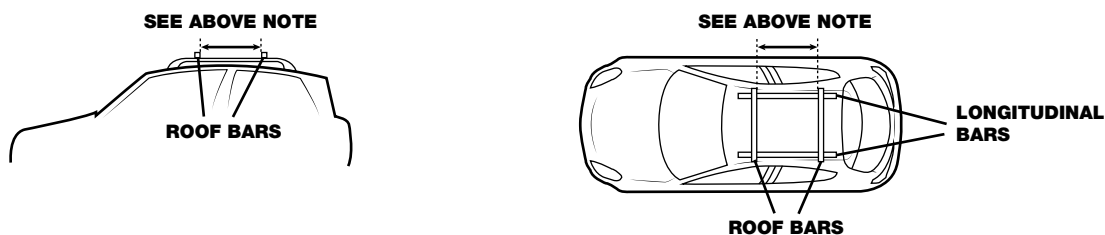


## FITTING:


2. Locate strengthening platform inside cargo pack
3. Place cargo pack centrally on the roof bars - "zip" to rear
4. Load cargo pack, ensuring the load is evenly distributed across this platform
5. Seal the cargo pack
6. Strap tie down system

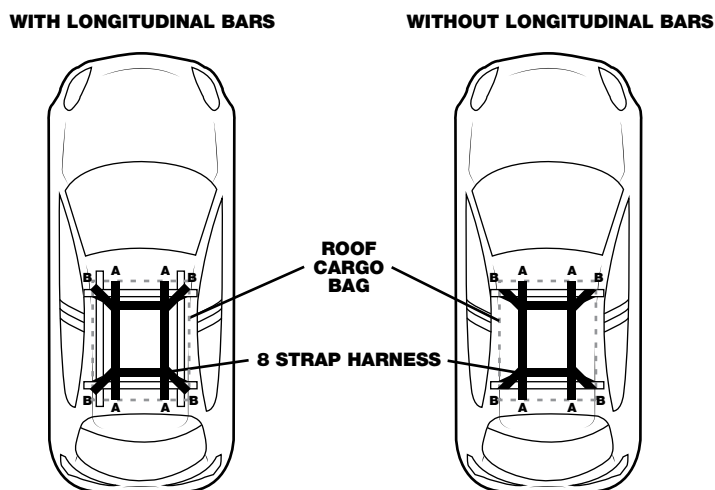

## STRAP ASSEMBLY

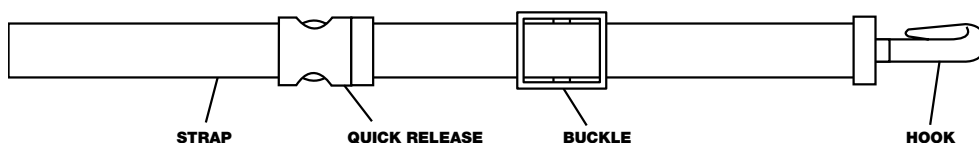

7. Release quick release mechanism
8. Pass strap around bar, as shown right
9. Re-attach quick release mechanism
10. By means of the strap and buckle, fully tighten and secure load
11. The hook (on sum 830 only) may be used to clip the two parts of the strap together for storage only.  
**DO NOT USE HOOKS AS RETAINING STRAPS ON VEHICLE**

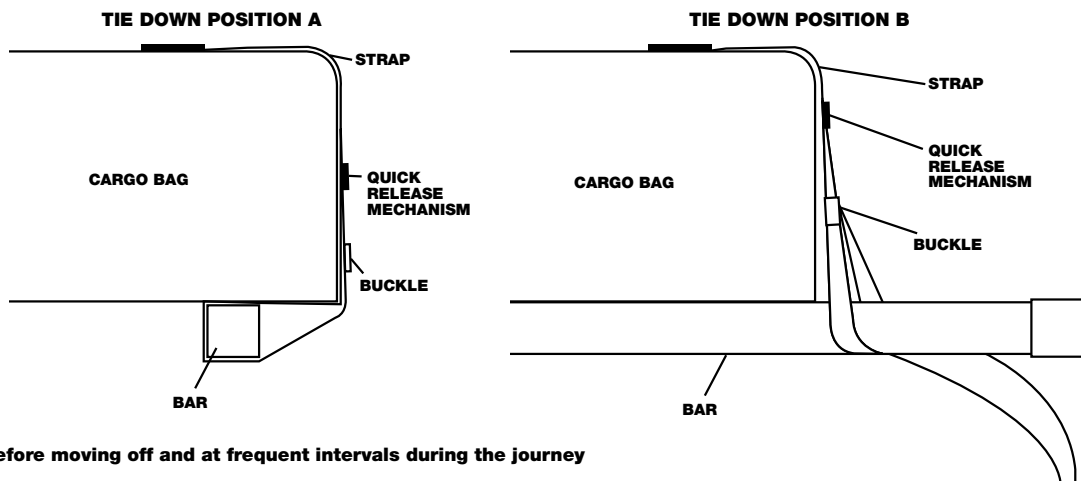

**Note: re-check security before moving off and at frequent intervals during the journey**



Distributed by:  
Mountney Limited 10 Chartmoor Road, Leighton Buzzard, Bedfordshire. LU7 4WG  
Tel: +44 (0) 1525 383055/131 Fax: +44 (0) 1525 370443 Email: info@mountneyltd.com www.mountneyltd.com